


Vertical section v1.1

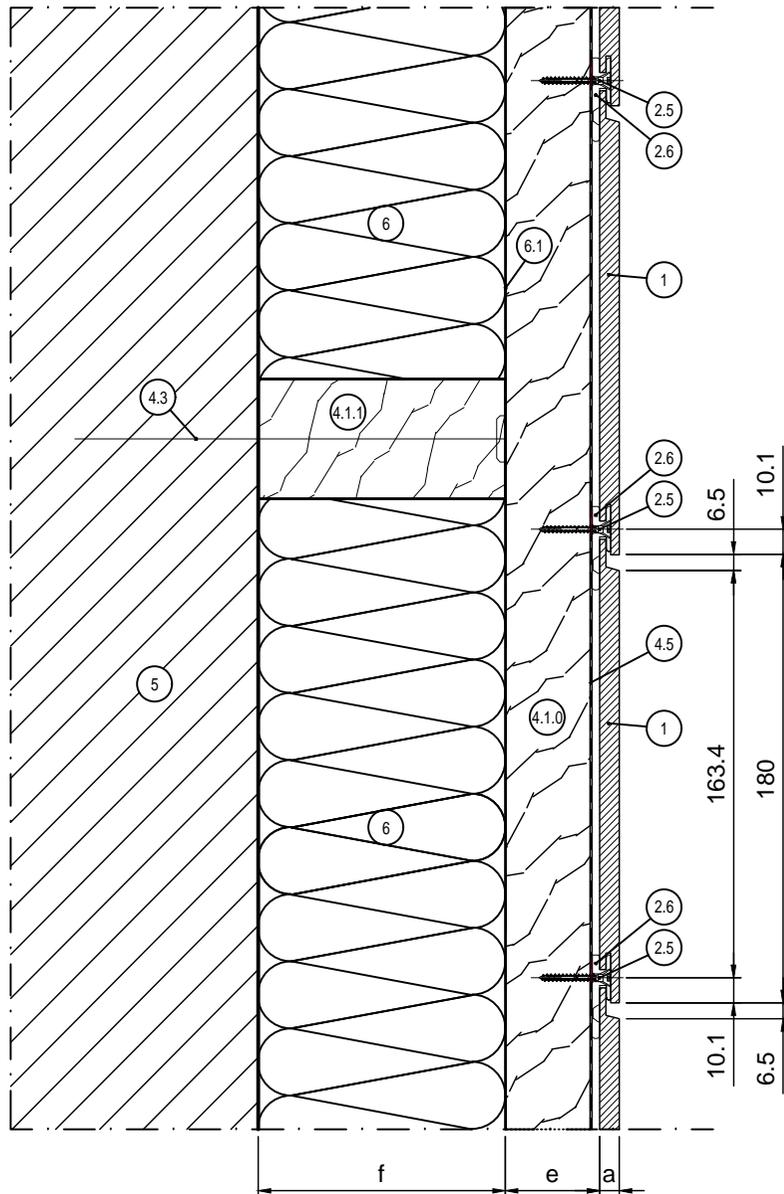

LEGEND:	
1	Trespa® PURA NFC® panel
2.5	Counter sunk screw (WÜRTH 3.5 30/25, AW 20)
2.6	Universal clip
4.1.0	Vertical timber batten (min. 95 - 110 x 34 mm)
4.1.1	Horizontal counter batten
4.3	Wall anchor
4.5	EPDM gasket
5	Wall
6	Insulation
6.1	(UV resistant) breather membrane (optional)

GENERAL INFORMATION:	
a	Panel thickness 8 mm
e	Ventilation min. 20 mm. Recommended max. cavity depth (between rainscreen cladding and insulation): 50 mm. Ventilation inlets and outlets min. 50 cm ² /m
f	Insulation (thickness)

Building/ Department		Alg.		TRESPA®		Remarks	
Revision		A3		PURA FS v1.1		10	
Date		JAN 2016		Passingen I.S.O.		Size Number Revision Sheet	
Scale		1:2		Name		Façade cladding with Trespa® PURA FLUSH Siding Detail v1.1 – Panel overlap	